




Gooseneck & Pintle

www.bigtextrailers.com

25GN

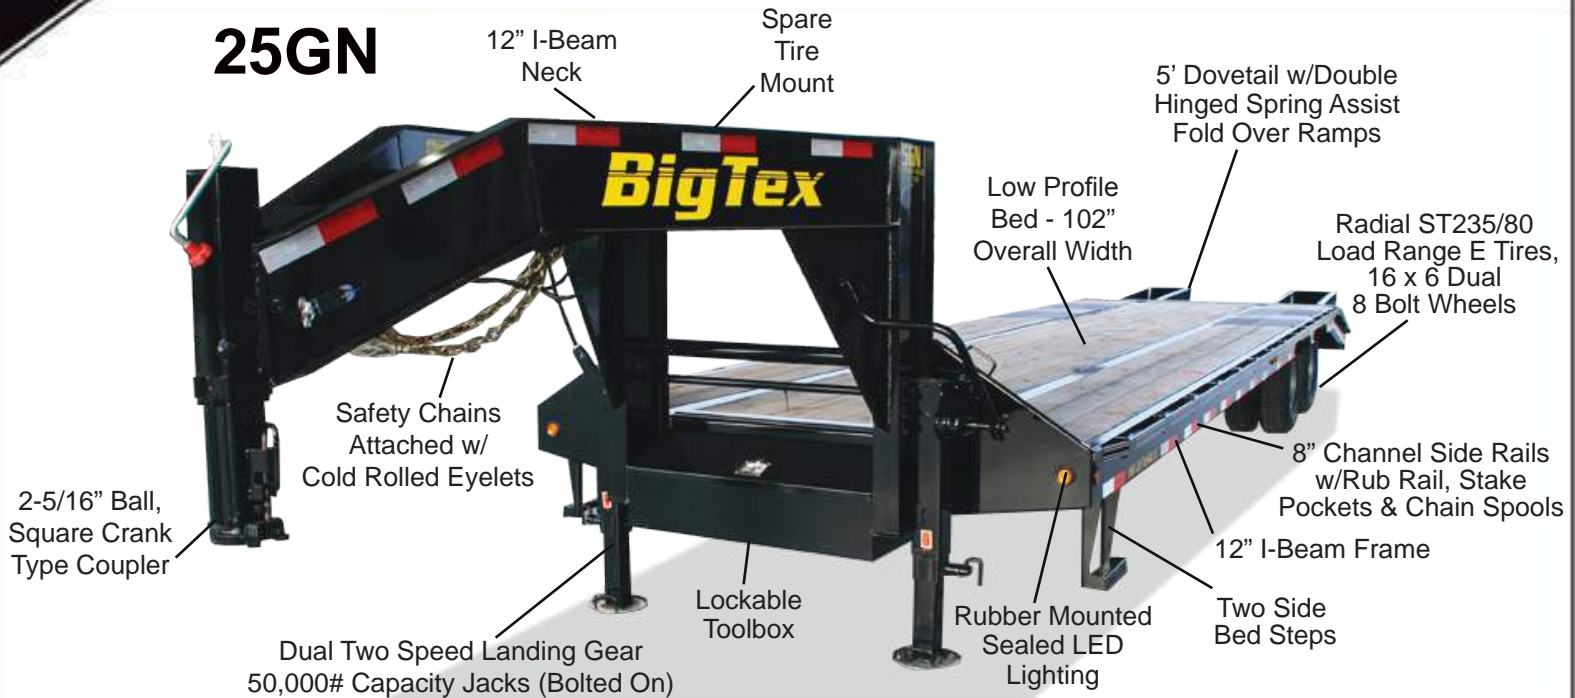

12GP



- Gooseneck Heavy Duty Tandem Axle Pipe Trailer comes in 83" width and in lengths of 18' and 20' ■ Approximate Carrying Capacity is 9,070# for the 18' and 8,900# for the 20'
- 2-5/16" Ball Adjustable Pipe Coupler ■ 16" Tires (8 bolt)
- 8" Channel Neck ■ 5" x 3" x 1/4" Angle Frame
- 2-7/8" Pipe Square Back Top Rail w/Self Sealing Plugs
- Two 6,000# EZ Lube Axles w/Electric Brakes ■ 4' Slide In Channel Ramps

14GP



- Gooseneck Heavy Duty Tandem Axle Pipe Trailer comes in 83" width and in lengths of 20' and 24' ■ Approximate Carrying Capacity is 10,800# for the 20' and 10,430# for the 24'
- 2-5/16" Ball Adjustable Pipe Coupler ■ 16" Tires (8 bolt)
- 8" Channel Neck ■ 5" x 3" x 5/16" Angle Frame
- 3" Square Tubing Top Rail ■ Two 7,000# EZ Lube Axles w/Electric Brakes
- 4' Slide In Channel Ramps

14GN/14PH



- Tandem Axle Gooseneck Trailer comes in 102" width and in lengths ranging from 20'+5' to 30'+5' ■ Approximate Carrying Capacity ranges from 7,780# to 9,080#, depending on length of trailer
- 2-5/16" Ball Adjustable Pipe Coupler on Gooseneck, 3" ID on Pintle
- 16" Tires (8 bolt) ■ 12" I-Beam Neck ■ 12" I-Beam Frame
- 5" Channel Side Rail w/Rub Rail, Stake Pockets and Chain Spools
- Two 7,000# EZ Lube Axles w/Electric Brakes ■ 5' Dovetail w/Double Hinged Spring Assist Fold Over Ramps

20GN/20PH



- Tandem Axle Gooseneck Trailer comes in 102" width and 20' + 5' length
 - 14,870# Approximate Carrying Capacity
 - 2-5/16" Ball Adjustable Pipe Coupler on Gooseneck, 3" ID on Pintle
 - 16" Tires (8 bolt) ■ 12" I-Beam Neck ■ 12" I-Beam Frame
 - 5" Channel Side Rail w/Rub Rail and Stake Pockets
 - Two 10,000# Dual Wheel Axles w/Electric Brakes
 - 5' Dovetail w/Double Hinged Fold Over Ramps

21GN



- Triple Axle Gooseneck Trailer comes in 102" width and in lengths of 20'+5' and 24' + 5' ■ Approximate Carrying Capacity for the 20' + 5' is 15,920# and 15,450# for the 24' + 5' ■ 2-5/16" Ball Adjustable Square Crank Type Coupler ■ 16" Tires ■ 12" I-Beam Neck ■ 12" I-Beam Frame
- 5" Channel Side Rail w/Rub Rail, Stake Pockets and Chain Spools
- Three 7,000# EZ Lube Axles w/Electric Brakes
- 5' Dovetail w/Double Hinged Spring Assist Fold Over Ramps

22GN



- Tandem Dual Axle Gooseneck Trailer comes in 102" width and in lengths ranging from 20'+5' to 35'+5', 36' and 40'
 - Approximate Carrying Capacity ranges from 14,400# to 16,820#, depending on length of trailer ■ 2-5/16" Ball Adjustable Square Crank Type Coupler ■ 16" Tires (8 bolt) ■ 12" I-Beam Neck ■ 12" I-Beam Frame
 - 6" Channel Side Rail w/Rub Rail, Stake Pockets and Chain Spools
 - Two General Duty 10,000# Dual Wheel Axles w/Electric Brakes (Oil Bath)
 - 5' Dovetail w/Double Hinged Spring Assist Fold Over Ramps

25GN



- Heavy Duty Tandem Dual Axle Gooseneck Trailer comes in 102" width and in lengths ranging from 20'+5' to 35'+5', 36' and 40'
 - Approximate Carrying Capacity ranges from 17,460# to 19,410#, depending on length of trailer ■ 2-5/16" Ball Square Crank Type Coupler ■ 16" Tires (8 bolt) ■ 12" I-Beam Neck ■ 12" I-Beam Frame
 - 44K Adjustable Suspension ■ 8" Channel Side Rail w/Rub Rail, Stake Pockets and Chain Spools ■ Two Heavy Duty 10,000# Dual Wheel Axles w/Electric Brakes (Oil Bath) ■ 5' Dovetail w/Double Hinged Spring Assist Fold Over Ramps

3XGN



- Super Duty Tandem Dual Axle Gooseneck Trailer comes in 102" width and in lengths ranging from 20'+5' to 30'+5' ■ Approximate Carrying Capacity ranges from 21,370# to 23,770#, depending on length of trailer
 - 30,000#, 2-5/16" Ball Adjustable Crank Type Coupler ■ 17-1/2" Tires
 - 12" I-Beam Neck ■ 12 x 22# Frame up to 30' and 14 x 22# on 30' plus
 - 44K Adjustable Suspension ■ 8" Channel Side Rail w/Rub Rail, Stake Pockets and Chain Spools ■ Two Heavy Duty 15,000# Dual Wheel Axles w/Electric Brakes (Oil Bath) ■ 5' Dovetail w/Double Hinged Spring Assist Fold Over Ramps

OPTIONS



Deck on Neck



Center Pop-Up Dovetail



Underbody Toolbox



Sliding Winch